

Complete equipment

TDSP

- Machinery protection
- Continuous monitoring
- Analog & digital output
- Ethernet communication
- Multilevel diagnostic software
- Complete modularity and flexibility
- From a single machine to a complete plant



CEMB

BALANCING MACHINES

Imagine...

*a clean better world,
where rotating machines
are running safely
under a vigilant continuous monitoring system;
where performances are guaranteed
and reliability increases day by day.*

*This is what we do.
This is CEMB Vibration Analysis Division.*



CEMB


Cemb was founded in 1946 by Eng. Luigi Buzzi. In a short time, the company stepped up to a first-rank position on the market of balancing machines.

Both its capacity in meeting the requirements of customers and markets, and its ability in proposing original, innovating technical solutions resulted in the creation of "Vibration Analysis Division". This branch is oriented towards developing portable balancing equipments and over-control systems aimed also at large energy production plants.



MONITORING EQUIPMENTS

Cemb manufactures a wide range of appliances for the measurement of fixed ranges during the functioning of mechanical complexes. These systems can provide anytime the actual value of the measure under investigation, signal alarms and, in case, stop the machine without any manual intervention as soon as the values reach the set alert thresholds, well before any serious damage occur.

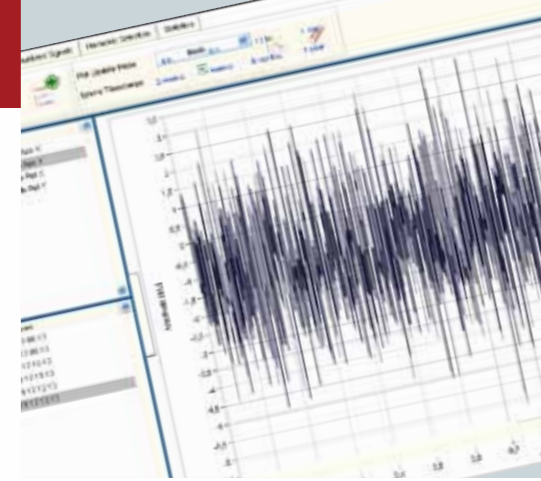

COMPLETE PACKAGE

Cemb not only provides for all the support needed in the installation process of its equipment, but it also assures the presence of specialized personnel for checks of all system components, all the way to a turnkey delivery.



PRE-POST SALES ASSISTANCE

Cemb provides for a complete assistance both at a development stage, in cooperating with the customers to find the most suitable product according to the target application, and at a post-sales stage, so as to make the most of its systems performances.



CONSULTANCY

Cemb's specialized technicians can count on a long experience in the field of vibrations analysis, balancing and problem solving. They cooperate with their customers as a continuous support for all Cemb activities.



TRAINING

Cemb, thanks to its know-how, is a qualified partner for all the companies dealing with problems regarding balancing, vibrations control and conditioned maintenance. CEMB can provide a full range of technical publications, containing a large number of monographies on vibrotechnics and maintenance. It is also possible to arrange for tailor-made courses at the Customer's premises. At the end of each course, an attendance certificate is issued.





The instrumentation for monitoring vibrations and diagnostics of machinery using the TDSP system is based on CEMB's many years experience in the field of vibro-technics and the diagnosis of rotating machinery.


Thousands of CEMB systems have been installed to protect steam / gas / hydraulic turbines, pumps, compressors and fans.

In addition to all the main functions required for monitoring, the TDSP system is designed with particular care to the operator interface, in order to simplify the correct management of the equipment.

The new TDSP system is designed using modern DSP based architecture to meet the demands for maximum

flexibility and modularity, providing a high performance solution to a wide range of needs. The TDSP system can be used either for protecting a single machine that calls for just a few measuring points, monitoring, acquiring and storing typical data for intelligent supervision or as a sophisticated diagnostic system used for machinery in a complete plant.

The system is based on the TDSP processing module, which is dual-channel and can operate on a stand-alone basis. Its terminal board makes it possible to connect to measuring transducers with analogue and digital inputs/outputs. The ethernet port on the front is used for configuring the board and makes it possible to connect to a dedicated PC that can be used for presenting data and for connecting to external diagnostic systems and/or DCS.

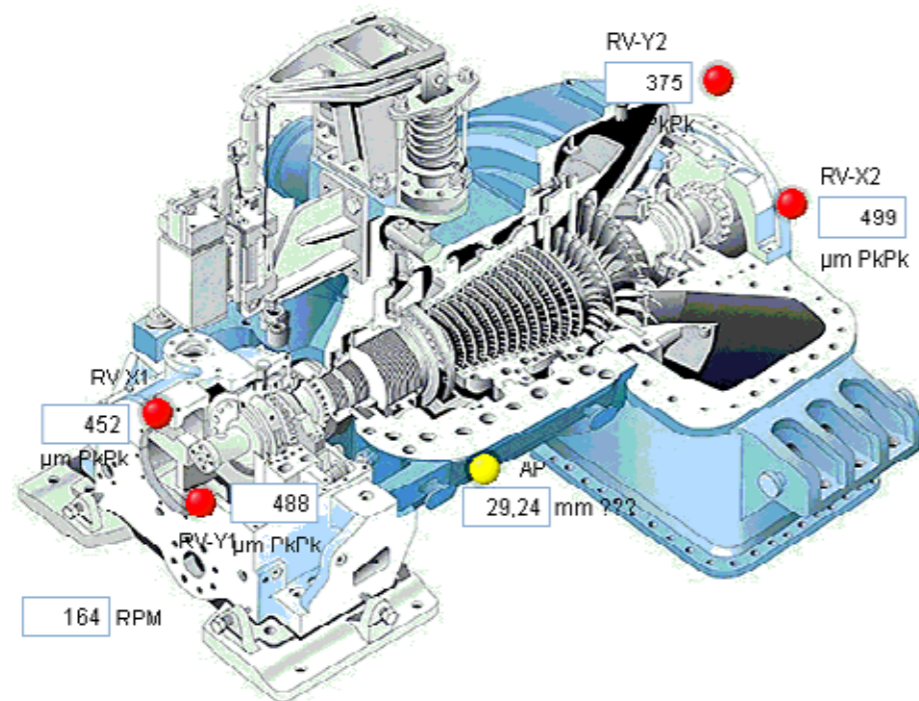

sensors



TA18-S Accelerometer



TV22 Velomitor



T1-40 Velocity



TNC8/API No-contact



TNC16 Differential expansion



T5-LVDT Absolute expansion



T7-LVDT Valve position




T6-H Speed




ITALIAN HEART:
All the engineering and production are made in Italy.

transducers



protection & monitoring system

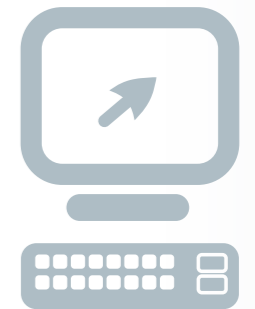

on-line monitor

on-line real time software

portable instruments



N100 Vibrometer



Dual channel N300 Vibrometer Balancer



Dual channel N500 Multifunction vibrometer Balancer



ADS

Advanced Diagnostic Software

post-processing software

one supplier, global solution

MODULES FEATURES:

- hot swap/plug
- real time & on-line
- high level intelligence on board
- decision making capabilities

SMART MULTICOLOR LED INDICATORS

For an easy operator analysis



19" RACK SIZE 3U

Small and custom for any kind of application

CONFIGURABLE VIA ETHERNET PORT

100Mbps with SW Set-up

FRONT PANEL BNC

For raw signal analysis

REDUNDANT POWER SUPPLY

- AC/DC power input
- Power relays status
- Led's status display
- 3 independent Phase reference channels
- 3 independent phase signal BNC

MODULE CHARACTERISTICS

- 2 Sensor inputs (including power supply)
- Phase reference
- 2 Analog outputs: 0-10V or 4-20mA opto isolated
- 4 Digital input (by-pass & trip multiplier)
- 6 independent relays with SPDT contact
- Any relay can be set in several way (eg Overall, 1x, 2x, Gap, non 1x)
- 2 BNC connectors for analysis
- 4 multicolour LED
- Ethernet port 100Mbps

MODULE BASIS FUNCTION

- Protection against short-circuits
- Self diagnosis for anomalous conditions
- Sampling and digital conversion of signal
- LED measurements status indication
- LED indication thresholds

TYPE OF MEASUREMENT

- Vibration
- Differential or absolute expansion
- Axial position
- Eccentricity
- Zero Speed
- Speed
- Over speed
- Reverse rotation
- Valve position
- WTVC (Wind turbine vibration controller)
- HTVC (Hydro turbine vibration controller)
- Generic process input 4-20mA

LEVEL 1 stand alone

▶ protection

FEATURES:

- Machine protection
- Analogue outputs
- Digital inputs and outputs
- Self diagnostic
- Led status



LEVEL 3 complete plant

▶ protection + visual + diagnostic

FEATURES:

- Level 1&2 plus:
- Network of TDSP system



REMOTE on site PC with ADS
Advanced Diagnostic Software



REMOTE PC
with
Advanced Diagnostic Software



LEVEL 2 intermediate

▶ protection + visual

FEATURES:

- Level 1 plus:
- Industrial PC with SW-On-line monitor
- SW TDSP set-up
- Time domain multitrend
- Global status graphical indicator
- Graphical user interface
- Real time machinery condition trend (Overall, 1x, 2x, non 1x, DC)
- Event history
- Plant organizer
- Remote diagnostic
- DCS integration through modbus TCP/IP communication



Integrated set-up software



Plant overview



Live trend



Live events list



turbine



feed water
pump



cooling
tower



industrial
fan



compressor



gear box



motor




CEMB presents ADS
the advanced software
for remote condition monitoring

With this powerful tool it is possible to load the data and make different types of analysis in post-processing. ADS has three different levels for satisfy all the requests coming from the market.

LEVEL 1 - Basic

features:

- Multilanguage interface
- Different operator levels
- Analysis time domain
- Trend
- Cursor
- Event list
- Upload data from database MS SQL server for ON-SITE analysis
- Import workspace for post-analysis
- Data export to different format (jpg, xls)
- Zoom

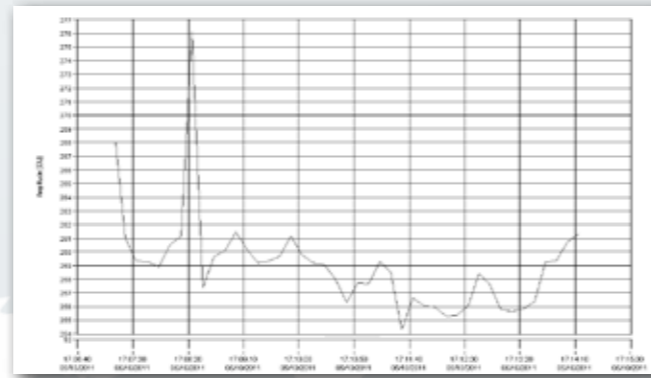


TREND: Single or multi-graph for an easy side by side comparison of different trends.


LEVEL 2 - Standard

features:

- All the functions level 1 plus
- Time waveform
- Cursor with extra features (Δt , Δf , pK-pK)
- Raw or filtered signal
- Statistic information
- Spectra
- Cursor
- Harmonic Cursor
- Linear or Log scale
- Peak list

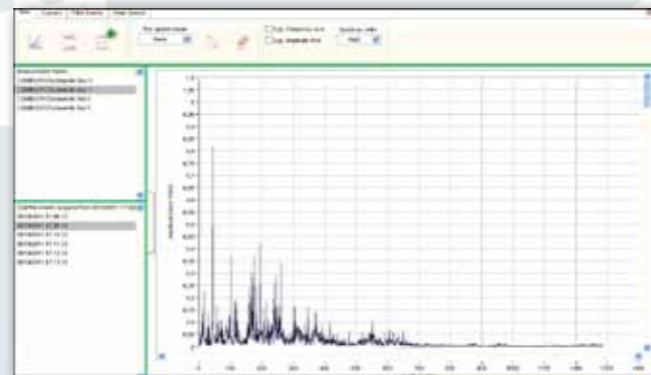

SPECTRA: Frequency domain representation of vibration signal for machinery troubleshooting.

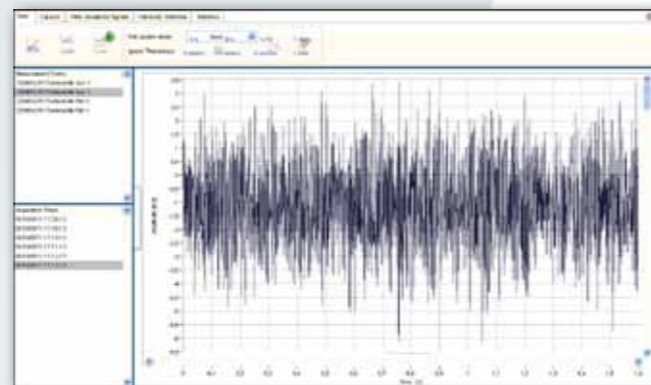


WAVEFORM: Time domain representation of raw or filtered vibration signal.


LEVEL 3 - Expert

features:


- All the functions level 1 and 2 plus
- Orbit
- Waterfall
- Bode
- Nyquist
- Shaft Centerline
- Color mapHz
- Full spectrum

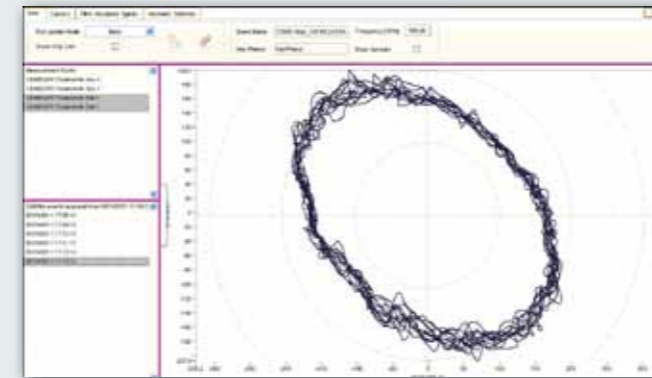


ORBIT: Time domain representation of X-Y vibration for analysis of shaft displacement.

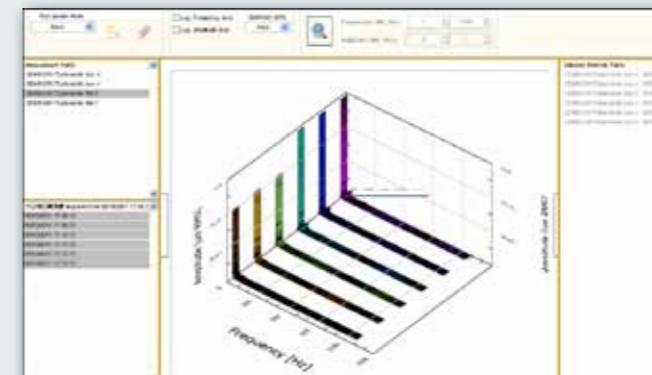


WATERFALL: 3D graph of multispectra data.

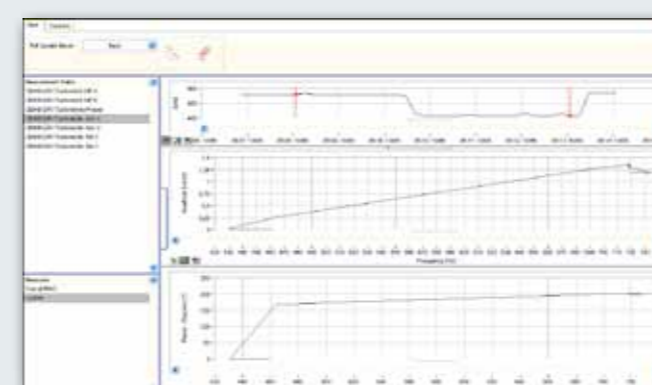


BODE: Amplitude and phase graph VS rpm for ramp-up / coast down analysis.

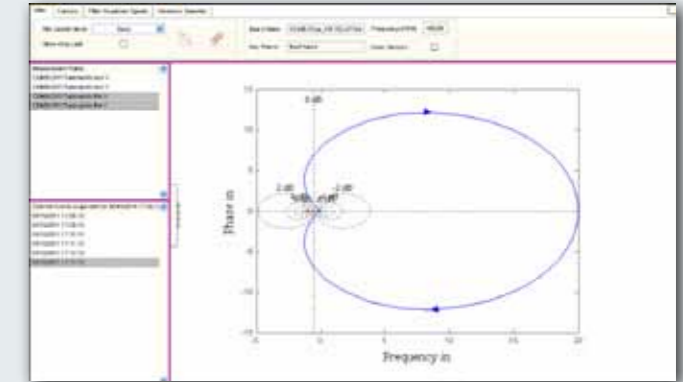


NYQUIST: Nyquist diagram for ramp-up / coast down analysis.

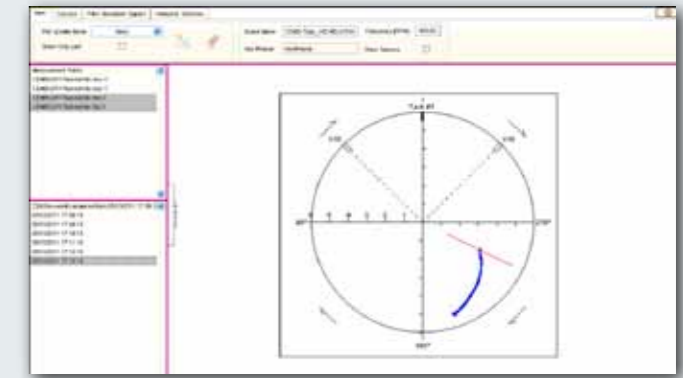

SHAFT CENTERLINE: Graphical representation of shaft displacement during ramp-up / coast down.

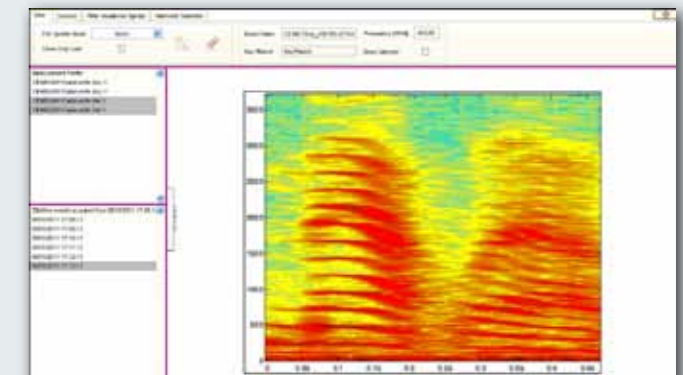

COLOR MAPHz: Time – frequency coloured graph for ramp-up / coast down analysis.

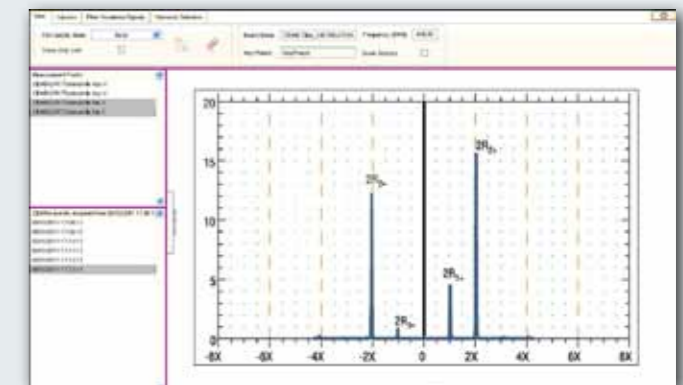

FULL SPECTRUM: Frequency analysis with separation of Forward – Backward components for advanced analysis.



CEMB

BALANCING MACHINES



CEMB S.p.A.

Via Risorgimento, 9
23826 MANDELLO DEL LARIO (LC) Italy
www.cemb.com



Vibration analysis division:

phone +39 0341 706111
fax +39 0341 706299
e-mail: stm@cemb.com

CEMB HOFMANN UK

www.cembhofmann.co.uk

CEMB SHANGHAI OFFICE

www.cemb.com.cn

CEMB USA

BL Systems Inc.

www.cemb-usa.com

All the data and features mentioned in this catalogue are purely for information and do not constitute any commitment on the part of our company, which reserves the right to make any and all alterations it may consider suitable without notice.

ASTA19220 www.digimediasas.it

CEMB

Cemb USA

Cemb Hofmann UK

Hofmann Germany

Cemb Hofmann Spain

Cemb Hofmann Shanghai

Cemb Shanghai

Everywhere, close to the customer...